



HUST metal enclosures



Application

- ※ Designed to enclose electrical equipment and protect against dirty, polluted environments.
- ※ For use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- ※ Impressive styling features make the enclosure a suitable addition to any high-tech equipment installation.
- ※ For high temperature applications, a gasket retainer may be required, please refer to factory.


Construction

- ※ Body and cover are made of 1.2mm mild steel. Mounting plate in sheet steel or galvanized steel.
- ※ Continuously hinged cover has steel hinges and provides 120° opening.

Finish

- Standard cycle epoxy polyester power finish.
- ※ Body and doors RAL 7032 textured finish.
 - ※ Mounting plate in RAL 2004 smooth finish.

Outline dimension

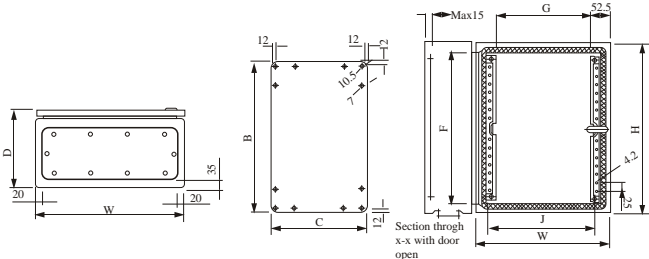

CATNO.	Dimension(mm)			Thickness(mm)	
	H	W	D	Door	Body
JX2-215	200	200	150	1.2	1.2
JX2-2515	250	200	150	1.2	1.2
JX2-315	300	200	150	1.2	1.2
JX2-320	300	200	200	1.2	1.2
JX25-315	300	250	150	1.2	1.2
JX25-320	300	250	200	1.2	1.2
JX25-325	300	250	250	1.2	1.2
JX3-315	300	300	150	1.2	1.2
JX3-320	300	300	200	1.2	1.2
JX3-325	300	300	250	1.2	1.2
JX3-415	400	300	150	1.2	1.2
JX3-420	400	300	200	1.2	1.2
JX3-425	400	300	250	1.2	1.2
JX3-430	400	300	300	1.2	1.2
JX4-415	400	400	150	1.2	1.2
JX4-420	400	400	200	1.2	1.2
JX4-425	400	400	250	1.2	1.2

CATNO.	Dimension(mm)			Thickness(mm)	
	H	W	D	Door	Body
JX4-430	400	400	300	1.2	1.2
JX3-515	500	300	150	1.2	1.2
JX3-520	500	300	200	1.2	1.2
JX3-525	500	300	250	1.2	1.2
JX3-530	500	300	300	1.2	1.2
JX4-515	500	400	150	1.2	1.2
JX4-520	500	400	200	1.2	1.2
JX4-525	500	400	250	1.2	1.2
JX4-530	500	400	300	1.2	1.2
JX5-515	500	500	150	1.2	1.2
JX5-520	500	500	200	1.2	1.2
JX5-525	500	500	250	1.2	1.2
JX5-530	500	500	300	1.2	1.2
JX4-615	600	400	150	1.2	1.2
JX4-620	600	400	200	1.2	1.2
JX4-625	600	400	250	1.2	1.2
JX4-630	600	400	300	1.2	1.2
JX5-615	600	500	150	1.5	1.2
JX5-620	600	500	200	1.5	1.2
JX5-625	600	500	250	1.5	1.2
JX5-630	600	500	300	1.5	1.2
JX6-615	600	600	150	1.5	1.2
JX6-620	600	600	200	1.5	1.2
JX6-625	600	600	250	1.5	1.2
JX6-630	600	600	300	1.5	1.2
JX4-720	700	400	200	1.5	1.2
JX4-730	700	400	300	1.5	1.2
JX5-715	700	500	150	1.5	1.2
JX5-720	700	500	200	1.5	1.2
JX5-725	700	500	250	1.5	1.2
JX5-730	700	500	300	1.5	1.2
JX6-720	700	600	200	1.5	1.2
JX6-725	700	600	250	1.5	1.2
JX6-730	700	600	300	1.5	1.2
JX6-820	800	600	200	1.5	1.5
JX6-825	800	600	250	1.5	1.5
JX6-830	800	600	300	1.5	1.5
JX8-820	800	800	200	1.5	1.5
JX8-825	800	800	250	1.5	1.5
JX8-830	800	600	300	1.5	1.5
JX6-1020	1000	600	200	1.5	1.5
JX6-1025	1000	600	250	1.5	1.5
JX6-1030	1000	600	300	2.0	1.5
JX7-1020	1000	700	200	2.0	1.5
JX8-1020	1000	800	200	2.0	1.5
JX8-1025	1000	800	250	2.0	1.5
JX8-1030	1000	800	300	2.0	1.5
JX10-1025	1000	1000	250	2.0	1.5
JX10-1030	1000	1000	300	2.0	1.5
JX6-1220	1200	600	200	2.0	1.5
JX6-1225	1200	600	250	2.0	1.5
JX6-1230	1200	600	300	2.0	1.5
JX8-1220	1200	800	200	2.0	1.5
JX8-1225	1200	800	250	2.0	1.5
JX8-1230	1200	800	300	2.0	1.5
JX10-1225	1200	1000	250	2.0	1.5
JX10-1230	1200	1000	300	2.0	1.5
JX12-1225	1200	1200	250	2.0	1.5
JX12-1230	1200	1200	300	2.0	1.5
JX6-1430	1400	600	300	2.0	1.5
JX8-1430	1400	800	300	2.0	1.5
JX10-1430	1400	1000	300	2.0	1.5
JX12-1430	1400	1200	300	2.0	1.5
JX8-1630	1600	800	300	2.0	1.5
JX10-1630	1600	1000	300	2.0	1.5
JX8-1830	1800	800	300	2.0	1.5
JX10-1830	1800	1000	300	2.0	1.5
JX12-1840	1800	1200	400	2.0	1.5